


Troubleshooting Sharp Aquos Board

Step 1:

Turning power on/off

Press the POWER button to turn the power ON/OFF.



POWER button / Power LED

Status	Status of the monitor
Green lit	Power on
Orange lit	Power off (Standby mode)
Green flashing	Input signal waiting mode

On the bottom left corner of the screen you will see the power button. Once display is on press **Touch Menu** to the right of the **Power** button.


Step 2:



TOUCH MENU button

Press the **Touch Menu** button.

Step 3:

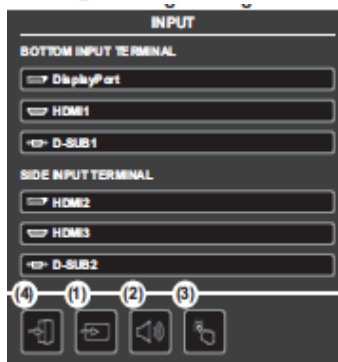

Touch the screen to change **Settings**

- HDMI 1 – Shuttle PC
- HDMI 2 – WePresent

Step 4:

When you finish your presentation, turn **Off** the Sharp display by clicking on the **Green** power button.